Installation Sheet)

KSR1156

Read these instructions before commencing installation & retain them for future reference.

IP44 □ **(€** 240V 7W

Important Information

It is recommended that luminaires are installed by a qualified electrician. The installation of this product must comply with the current edition of the IEE wiring regulations BS7671.

These products are designed for connection to a 240V 50Hz supply. Any damaged parts should be replaced as soon as possible.

KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice

Always switch off mains supply before installation or servicing. KSR recommends a maintenance schedule of washing down with soapy water (no abrasive cleaners).

Installation Details

Remove and retain the diffuser by carefully releasing the 4 tabs (2 each side).

Remove the single screw and retain to the cable cover.


Fix the plastic back plate to wall using suitable fixings for the substrate. Connect the supply to the terminal block: Brown (Live) and Blue (Neutral) as per Fig.1.


Refit the cable cover.


17-04-15


Attach the diffuser back on to the bulkhead.

Switch on supply, test and adjust the PIR as per Fig. 2.















Available finish:- Black

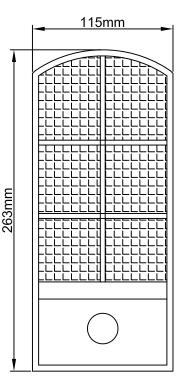

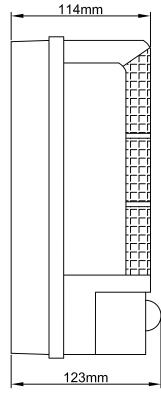

KSR1156

Lamp/PIR Details

Light Source: Dedicated LED

Wattage: 7W

Lumen Output: 600 Lumens

CRI: 85

Colour: 4000K

Time Adjustment: Min. 5 seconds \sim 5 Minutes Max. Lux Adjustment: Min: 20 lux \sim 2000 lux Max.

KSR Lighting Aftersales: 023 92 674343

E-mail: info@ksr-lighting.co.uk