

GU10 640LM 6W 4000K DIMMABLE 36 BEAM INTEGRAL

ILGU10DE118



The Integral LED High Lumen GU10 range offers a fantastic ratio of value and performance. By incorporating a stylish engineered lens in an affordable GU10, the High Lumen offers directional light with a beam angle that closely mirrors that of familiar halogen lamps along with all the energy-saving and long-life benefits of LED.

Details

Quick Order Code:	925008
Barcode:	5055788255574
Category:	Lamps
Range Name:	240V GU10 Base
Product Type:	GU10
Product Body Finish:	Matt white
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	54
Product Width (mm):	50
Product Weight (g):	28
Optic:	Designed to give a Classic Look
Material:	Plastic and Aluminium heat-sink, Injection moulded diffuser
Base Term:	GU10
Bulb Base:	GU10
Construction:	Plastic White and "Classic look" diffuser lens
Globe Finish:	Clear
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting
Spot Type:	SMD

Electrical Data

Power Consumption (w):	6
Power Factor:	0.6


Wattage equivalent (W):	75
Amperage (mA):	41
Dimming:	Dimmable with compatible dimmers
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	75
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	640
Peak Intensity (Cd):	950
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature:	4000K - Cool White
Colour Temperature Name:	Cool White
Beam Angle:	36
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight JQP401W
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	25000
Switching Cycles:	12500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A++
New Energy Rating:	E
Hg 0% (Mercury Free):	Yes
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

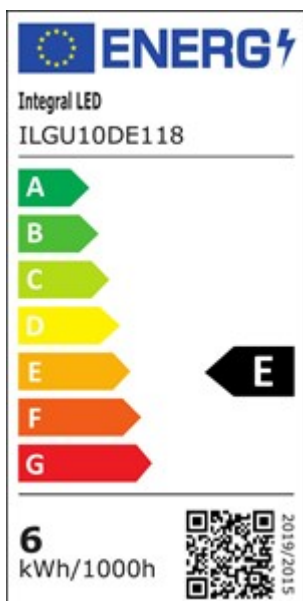

Packaging

Portal.integral-led.com

	38
Package Weight (g):	48
Package Length (mm):	48
Package Width (mm):	62
Package Depth (mm):	